peplink | PEPWAVE



Balance 1350

Large Enterprise SD-WAN. Combine 13 Links.

More info : click here

At a Glance

13x
Ethernet WAN
(Gigabit Ethernet)

3x
Ethernet LAN
(Gigabit Ethernet)


1x
USB WAN Port

5Gbps
Stateful Firewall Throughput

800Mbps
PepVPN Throughput
(256-bit AES)

800
VPN Peers

Balance 1350
Specifications

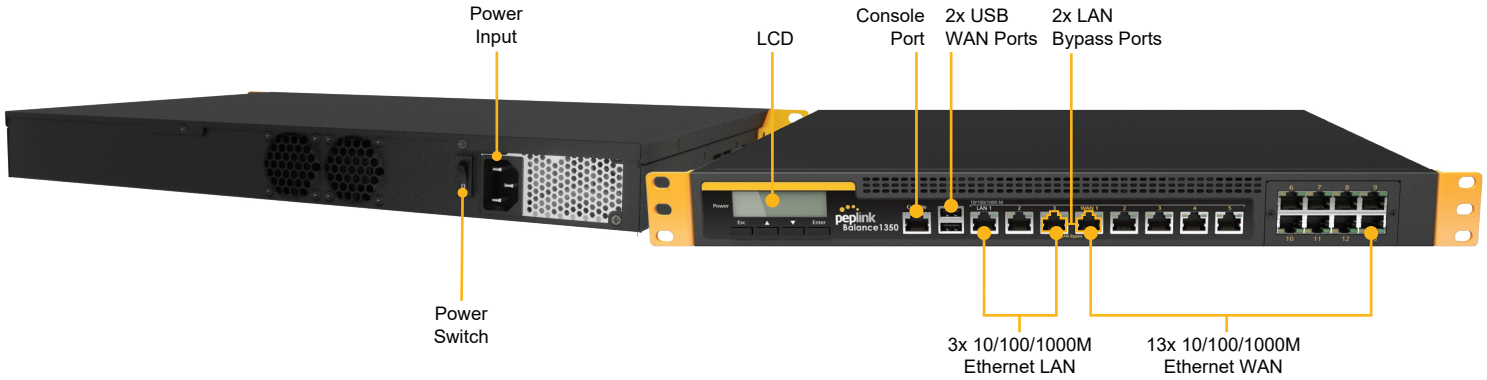

WAN Interface	13 (GE) 1x USB Interface
LAN Interface	3 (GE)
Stateful Firewall Throughput	5 Gbps
PepVPN Throughput (No Encryption)	800 Mbps
PepVPN Throughput (256-bit AES)	800 Mbps
Recommended Users	1000 - 5000
Number of PepVPN SpeedFusion Peers	800
Maximum Number of AP Supported	500
SpeedFusion Hot Failover	Yes
SpeedFusion WAN Smoothing	Yes
SpeedFusion Bandwidth Bonding	Yes
Central Management	InControl 2
High Availability	Yes
Drop-in Mode	Yes
Content Filtering	Full
Manage Pepwave AP	Yes

Remote AP & Multiple Config Profiles Management	Yes
LAN Bypass	Yes
Remote User Access	Yes
L2TP / PPTP VPN Server	Yes
Bandwidth Usage Monitor	Yes
QoS for VoIP and E-commerce	Yes
User Groups Bandwidth Control	Yes
Web Blocking	Yes
Operating Temperature	32°– 104° F / 0°– 40° C
LACP (802.3ad) NIC Bonding	Yes
Power Consumption	70 W
1U Rack-mount	Yes
Dimensions (W x D x H)	16.8 x 12 x 1.73 inches / 42.6 x 30.5 x 4.4 cm
Weight	15.4 pounds / 7 kg
Certifications	FCC, CE, RoHS
Warranty	1-Year Limited Warranty
Package Content	1x Balance 1350 Power Cord (ACW-614) 1 Pair of Mounting Brackets (ACW-382)

Ordering Information

Product Code	Model	Description
BPL-135	Balance 1350	13x GE WAN ports and 3x GE LAN ports. SpeedFusion capable.

©Peplink. All rights reserved.
Ref. no: balance-1350-202107-v1